
Penlon Prima 460 Anaesthetic Machine

ANAESTHESIA SOLUTIONS

- 15.6" high-definition touchscreen display
- Virtual flowmeter
- Eight ventilation modes with PEEP, including PRVC
- Suitable for adult, paediatric and neonates
- Optional Anaesthetic Gas Monitoring
- HIS connectivity



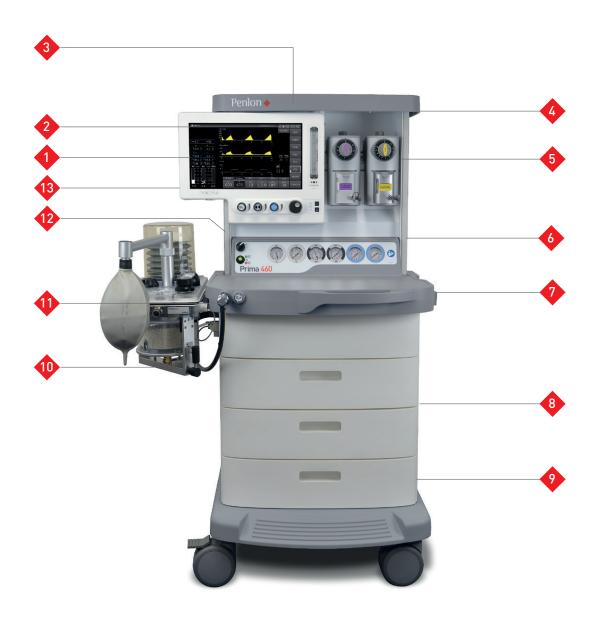

The features and options you need

- 15.6" high-definition touchscreen display with intuitive user interface and virtual flow display
- Eight ventilation modes with PEEP in all modes
- ◆ Versatile top shelf with secure GCX™ mounting system for patient monitors
- 4 Electrical outlet options
- 5 Selectatec® compatible backbar (two station)
- **6** Up to three cylinders
- Illuminated work space

- GCX™ compatible aluminium uprights for additional accessory mounting

 GCX™ compatible aluminium uprights for accessory mounting

 GCX™ compatible aluminium uprights for accessory mounting

 GCX™ compatible accessory mounting

 GCX™ co
- Standardised large capacity drawer units
- Integrated CO₂ absorber and bellows unit with heater fitted as standard
- 1 Optional backlit Auxiliary Common Gas Outlet
- 12 Optional oxygen therapy flowmeter
- 13 Optional anaesthetic gas monitoring

The Penlon Prima 460 is the latest update to the Penlon anaesthetic machine range, providing the ideal solution for today's busy operating room

Clinician-focused choices and benefits, including intuitive 15.6" high-definition touchscreen with virtual flow display and user-selectable waveform and respiratory loop displays



Flow Control and Visualisation

15.6" high-definition touchscreen display provides virtual flow display, O_2 concentration and gas mixture.



Enhanced Patient Safety

Accurate mechanical anti-hypoxic device, total flow display and backup O_2 gas delivery system.



Waveforms and Respiratory Loops

Airway Pressure plus two user-selectable waveform or respiratory loop displays.



Dual Flow Sensors

Inspiratory and expiratory volume measured and displayed on the screen.



Patient Profiles

Suitable for adult, paediatric and neonatal patient profiles.



Monitoring

Anaesthetic gas, oxygen, pressure and flow monitoring with flexible GCX™ mounting for patient monitors.



Alarms

Audible and visual alarms with colour coding to highlight alarm levels.



Seven ventilation modes are available (VCV, PCV, PSV, SPONT, SIMV, SMMV, PRVC and Manual) with PEEP available in all modes except Manual.

2 CO₂ Absorber

A high performance absorber with a ventilator interface as standard that provides ventilator mode switching, triggered by the bag/ventilator control. The unit has a built-in heater and all the main components are autoclavable.



Electrical Power

Wide choice of territory-specific electrical power outlets.



Battery BackUp

Provides power to the machine for up to 75 minutes, in the event of an AC mains power failure.



Gas Supply Options

Up to three cylinder yokes and three central pipeline connections for O_2 , N_2O and Medical Air.



Optional Auxiliary Common Gas Outlet (ACGO)

Illuminated switch and front outlet provide visual indication of open breathing circuit.



Active AGSS

Disposes of waste gas and prevents possible health hazards to operating room staff.



Maintenance and After-Sales Support

Comprehensive warranty provides peace of mind and after-sales support. Additional services and warranties can be purchased to meet your particular needs.



Standards Compliant

Fully compliant to ISO 80601-2-13 and the Restrictions of Hazardous Substances (RoHS) Directive.

3 Anaesthesia Vaporizers

The award winning Sigma Delta and the new Sigma EVA desflurane vaporizers offer multiple agent and filler system options to suit all clinical requirements.

4 Penlon Patient Monitors

Simple intuitive user interface enables clinical staff to concentrate on improved patient outcomes with accurate physiological data, and to respond immediately to any change in condition.










Ventilation Modes

Seven ventilation modes are available as standard (VCV, PCV, PSV, SPONT, SIMV, SMMV, PRVC and Manual) with PEEP available in all ventilation modes except Manual.




Fresh Gas Control

Fresh gas flow is controlled using a proven conventional control system and mechanical anti-hypoxic device. Gas mixture is displayed using a colour-coded virtual flow display on the touchscreen.



Waveform Display

Airway Pressure plus two userselectable waveform or respiratory loop displays with a choice of Flow Rate, Tidal Volume, P-V Loop, V-F Loop or P-F Loop.



Patient Details

Patient details can be entered via the on-screen keyboard. Automatic average weight calculations are adjusted when height and weight are changed. Compatible with HL7 hospital information system (HIS).



The Penlon Prima 460 anaesthetic machine provides PEEP in all ventilation modes, accurate control, and a virtual flow display in a familiar and easy-to-use workstation.

Graphical User Interface

Clear, easy to use graphical user interface (GUI) with high-definition display of settings, and new stopwatch function.



Features and Benefits




Features	Benefits
Rotameters combined with a virtual flowmeter	Accurate gas delivery with measured flows
Multi-mode ventilator with eight ventilation modes	Suitable for multiple patient types and clinical cases
Anaesthetic gas monitoring	Monitor anaesthetic gases without the need for a separate monitor, optional paramagnetic Ω_2 monitoring
Integrated heater and water trap on the CO ₂ absorber	Reduces condensation risk and improves patient comfort
Absorber CO₂ bypass	Can change absorbent while ventilating a patient
Selectatec back bar	Can be used with any compatible vaporizer
Mechanical anti-hypoxic device and total flow display	Enhanced patient safety
Maintenance and after-sales support	Customer peace of mind
Integrated on-screen stopwatch function	Provides accurate timekeeping during procedures
HL7 connectivity	Provides Hospital Information Systems (HIS) capability
Territory-specific power outlets	Power external devices
AGS (anaesthetic gas scavenging) system	Alleviates contamination in theatre
Improved cable and hose management	Reduces clutter and trip hazards
Oxygen therapy flowmeter	For recovery and added safety
Side mounted suction controller kit	Keeps airways clear

About Penlon ◆

Penlon was founded in 1943 by personnel from the Department of Anaesthesia at Oxford University. One of the first products was the Macintosh Laryngoscope, then a revolutionary design, and still the most widely used today, invented by the late Sir Robert Macintosh, Professor of Anaesthetics.

Today Penlon continues to design, engineer and build high quality anaesthesia products at its UK operations headquarters. The company is proud to have over 80 years' dedicated experience, many awards for product design, and an impressive four Queen's Awards for Enterprise, one for 'Innovation' and three for 'International Trade'.

Penlon devices feature intuitive user interfaces that require minimal operator training, putting clinicians in control, enabling them to focus on what is most important – patient safety and wellbeing.

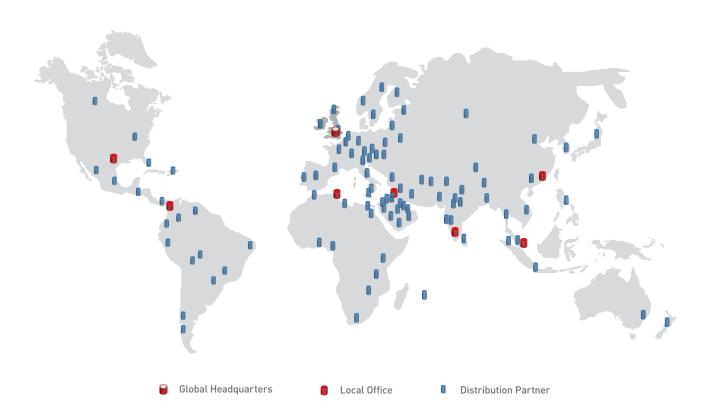





PenlonGlobal



company/penlon-ltd



PenlonGlobal PenlonGlobal





A Medcaptain Company

© Penlon Ltd. 2023 All rights reserved

Doc. No. FX1323SL / August 2023. Penlon and Prima are trademarks of Penlon Limited. All other trademarks are the property of their respective owners

EC REP

Belaium